



Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

FCC TEST REPORT

Report No : AST2208302002

Product Name : Pet Water Fountain

Product Model : CW-002

Applied Standard : FCC Rules and Regulations Part 15 Subpart B

Class B, ANSI C63.4:2014

Test Result : PASS

Issue Date : Aug 19, 2022

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: 086-0755-27781492

Fax.: 086-0755-27781492

Web.: www.ast-test.com

E-mail: ast@hangtianjc.com

Product Name	: Pet Water Fountain
Tested Model	: CW-002
Attached Model	: /
Trademark	: /
Applicant	: JIETAI PURIFICATION TECH CO., LTD
Address	: No. 175 Dashanjiao, Wuguishan District, Zhongshan City, Guangdong 528458, China
Manufacturer	: JIETAI PURIFICATION TECH CO., LTD
Address	: No. 175 Dashanjiao, Wuguishan District, Zhongshan City, Guangdong 528458, China
Factory	: JIETAI PURIFICATION TECH CO., LTD
Address	: No. 175 Dashanjiao, Wuguishan District, Zhongshan City, Guangdong 528458, China
Test date	: Aug. 13, 2022 to Aug. 18, 2022
Remark:	<i>This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Aerospace Testing Technology (Shenzhen) Co., Ltd.</i>

Prepared by



Mason

Aug 19, 2022

Reviewed by



Lucas

Aug 19, 2022

Approved by



Nero

Aug 19, 2022



Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: 086-0755-27781492

Fax.: 086-0755-27781492

Web.: www.ast-test.com

E-mail: ast@hangtianjc.com

Table of Contents

1. Test Laboratory	4
2. Summary of test result	5
3. Equipment Under Test information	6
4. Test Condition	7
4.1 Environmental conditions	7
4.2 Measurement uncertainty	7
5. Electromagnetic Interference (EMI)	8
5.1 Radiated Disturbance 30MHz to 1000MHz	8
5.2 Radiated Disturbance 1000MHz to 6000MHz	12
5.3 Conducted Disturbance 150 kHz to 30MHz	15
6. Measurement Instruments	20
7. Photos of the EUT	21
8. Photos of test setup	23

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: 086-0755-27781492

Fax.: 086-0755-27781492

Web: www.ast-test.com

E-mail: ast@hangtianjc.com

1. Test Laboratory

Test Site1	
Name	: Aerospace Testing Technology (Shenzhen) Co., Ltd.
Address	: 101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Phone	: + 086 0755-27781492
E-mail	: ast@hangtianjc.com
Test Site2	
Name	: Shenzhen Supersonic Measurement And Control Technology Co.,Ltd.
Address	: B2 Building 101, Jinweiyuan Industrial Plant Area, Julongshan District, Longtian Street Industrial Zone, Pingshan District, Shenzhen, Guangdong, China.
Phone	: + 086 0755-84636042
E-mail	: ranguangfu@supersonic-mc.com
Test Site3	
Name	: Shenzhen Academy of Metrology & Quality Inspection
Address	: No.4 Tongfa Road Xili Street Nanshan District, Shenzhen, Guangdong, China.
Phone	: +86 0755-26001833
E-mail	: qiubo@smq.com.cn
Test Report Form	: ASTCX-31-JL03-FCC Part15/18 EMC Test Report Ver.1.0
TRF Originator	: Aerospace Testing Technology (Shenzhen) Co., Ltd.
Master TRF	: Jul.1,2021

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: 086-0755-27781492

Fax.: 086-0755-27781492

Web.:www.ast-test.com

E-mail: ast@hangtianjc.com

2. Summary of test result

Test Items	Test site	Result
<u>Radiated Emissions (RE) 30MHz-1000MHz</u> <input checked="" type="checkbox"/> Enclosure Port	Site 1	Pass
<u>Radiated Emissions (RE)1000MHz-6000MHz</u> <input type="checkbox"/> Enclosure Port	Site 1	N/A
<u>Conducted Emission (CE)</u> <input checked="" type="checkbox"/> Mains port <input type="checkbox"/> Auxiliary ports <input type="checkbox"/> Wired network ports <input type="checkbox"/> Mains port of motor operated tools	Site 1	Pass
<u>Electrostatic Discharge (ESD)</u> <input type="checkbox"/> Enclosure Port	Site 2	N/A
<u>RF Electromagnetic Field (RS)</u> <input type="checkbox"/> Enclosure Port	Site 2	N/A
<u>Power frequency magnetic fields (PMF)</u> <input type="checkbox"/> Enclosure Port	Site 2	N/A
<u>Fast Transients Common mode (EFT)</u> <input type="checkbox"/> AC Power ports <input type="checkbox"/> DC Power ports <input type="checkbox"/> Signal and control lines	Site 2	N/A
<u>RF Common mode (CS)</u> <input type="checkbox"/> AC Power ports <input type="checkbox"/> DC Power ports <input type="checkbox"/> Signal and control lines	Site 2	N/A
<u>Surges</u> <input type="checkbox"/> AC Power ports	Site 2	N/A
<u>Voltage Dips and Interruptions (AC DIP)</u> <input type="checkbox"/> AC Power ports	Site 2	N/A

Note:

- test case does not apply to the test object.....: N/A
- test object does meet the requirement.....: Pass
- test object does not meet the requirement: Fail

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: 086-0755-27781492

Fax.: 086-0755-27781492

Web.: www.ast-test.com

E-mail: ast@hangtianjc.com

3. Equipment Under Test information

Rating Voltage	: AC 120~240V	50/60Hz
Rating Current	: /	
Test Voltage	: AC 120V/60Hz	
The difference of the models	: /	

Table 3-1 Test Mode List

Mode No.	Test Mode	Test Voltage
Mode 1	Working	AC 120V/60Hz

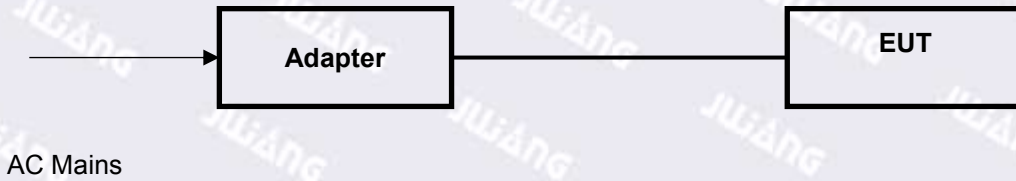


Figure 1-2 Test configuration

Table 3-2 Associated Equipment used during test

Name	Model	Manufacturer	S/N	Cal Due Date
/	/	/	/	/

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: .086-0755-27781492

Fax.: 086-0755-27781492

Web.:www.ast-test.com

E-mail: ast@hangtianjc.com

4. Test Condition

4.1 Environmental conditions

- Temperature : 23°C
- Relative humidity: 60%

4.2 Measurement uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Table 4-1 measurement uncertainty

Test Site	Measurement Frequency Range	U (dB)
SR843-1	150 kHz ~ 30MHz	3.2
SAC966-1	9 kHz ~ 30MHz	3.1
	30MHz ~ 1000MHz	3.4
	1000MHz ~ 6000MHz	3.2

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: 086-0755-27781492

Fax.: 086-0755-27781492

Web.: www.ast-test.com

E-mail: ast@hangtianjc.com

5. Electromagnetic Interference (EMI)

5.1 Radiated Disturbance 30MHz to 1000MHz

5.1.1 Test procedure

The EUT was configured as described in section 1 for this test. The enclosure port was tested.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 and CISPR 16-1-4. The test distance was 3m for 30~1GHz.

The set-up and test methods were according to CISPR 16-2-3.

A preliminary scan and a final scan of the emissions were made from 30MHz to 1GHz by using test script of software; the emissions were measured using Quasi-Peak Detector. The maximal emission value was acquired by adjusting the antenna height, polarization and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°, The receive antenna has two polarizations V and H.

5.1.2 Test method

- a) According as the EUT information, Configured the ports and powered the EUT with the normal voltage.
- b) The EUT was placed on the top of a table 0.8 meters above the ground at 3-meter SAC as figure 5-2 or 0.12m above the ground at 3-meter SAC as figure 5-3.
- c) The measuring distance of at 3m shall be used for measurements at frequency up to 1GHz.
- d) The polarizations of the antenna were set to horizontal.
- e) The height of the test antenna was 1m.
- f) The turn table was rotating from 0° to 360° and the test receiver pre-scan.
- g) Change the height of the test antenna from 1m to 4m, then repeated f) and recorded and save the maximum value.
- h) Select six points have little margin from limit and finally reading.
- i) Recording the maximum value, and the deg. and the height of the test antenna.
- j) Change the polarizations to vertical and repeated the e) to i).

5.1.3 Test setup

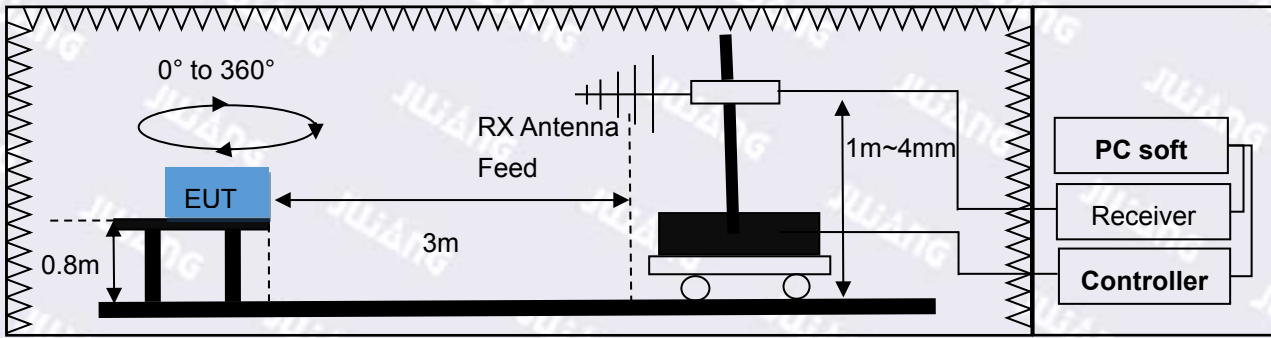


Figure 5-1 Test set-up of radiated disturbance(30MHz-1GHz)

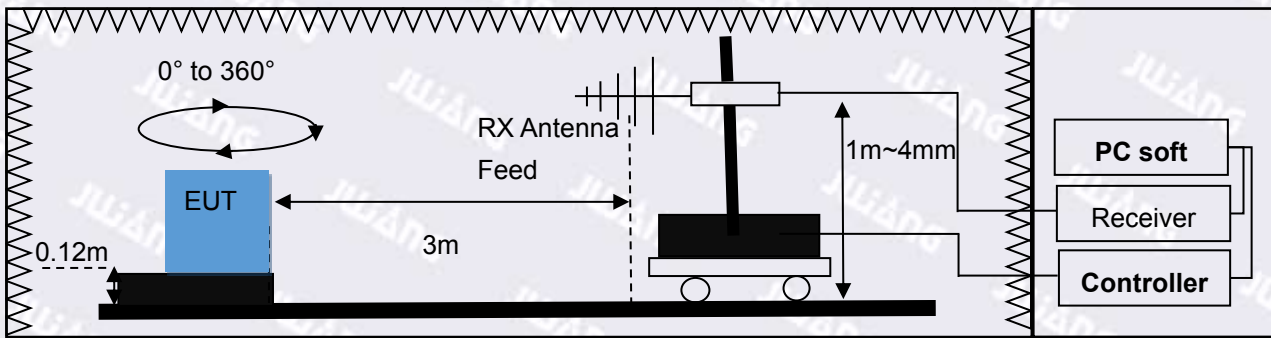


Figure 5-2 Test set-up of radiated disturbance(30MHz-1GHz)

5.1.4 Test limits

Table 5-1 RE test limits 30MHz to 1000MHz

Frequency (MHz)	Class A Quasi-peak dB μ V/m
30 to 88	20
88 to 216	21.8
216 to 960	23
960 to 1000	27

Note 1: Test distance is 3m.
 Note 2: The lower limit shall apply at the transition frequency.

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
 Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: .086-0755-27781492
 Fax.: 086-0755-27781492
 Web.:www.ast-test.com
 E-mail: ast@hangtianjc.com

5.1.5 Test results

The EUT has met requirements for Radiated disturbance. The test data as follow:

Remark:


Level= Reading Level + Factor,

Factor= Cable Loss +Antenna Factor – Amplifier,

(The Level is recorded by software which is not shown in the sheet).

Margin=Limit – Level.

Working

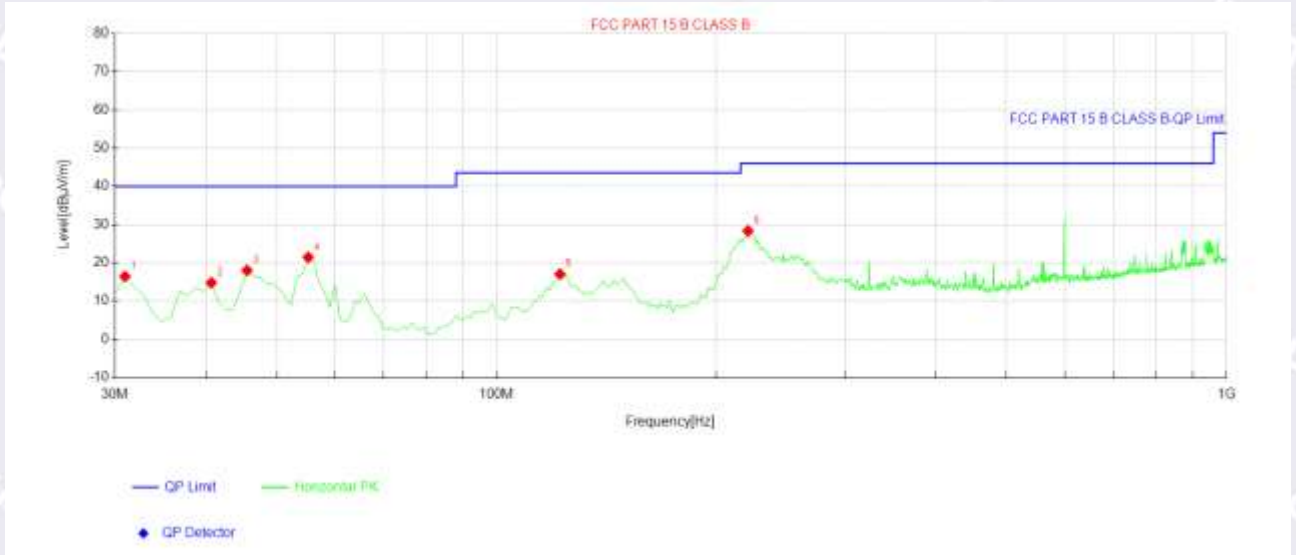

Suspected Test Data

NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Factor [dB]	Height [cm]	Angle [°]	Polarity	Result
1	30.97	16.40	40.00	23.60	-33.64	300	298	Horizontal	PASS
2	40.67	14.73	40.00	25.27	-31.54	300	3	Horizontal	PASS
3	45.52	17.99	40.00	22.01	-30.81	100	166	Horizontal	PASS
4	55.22	21.42	40.00	18.58	-31.17	300	77	Horizontal	PASS
5	122.15	17.00	43.50	26.50	-34.68	300	349	Horizontal	PASS
6	221.09	28.31	46.00	17.69	-31.77	100	221	Horizontal	PASS

Aerospace Testing Technology (Shenzhen) Co., Ltd.


101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park, Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: .086-0755-27781492

Fax.: 086-0755-27781492

Web.:www.ast-test.com

E-mail: ast@hangtianjc.com

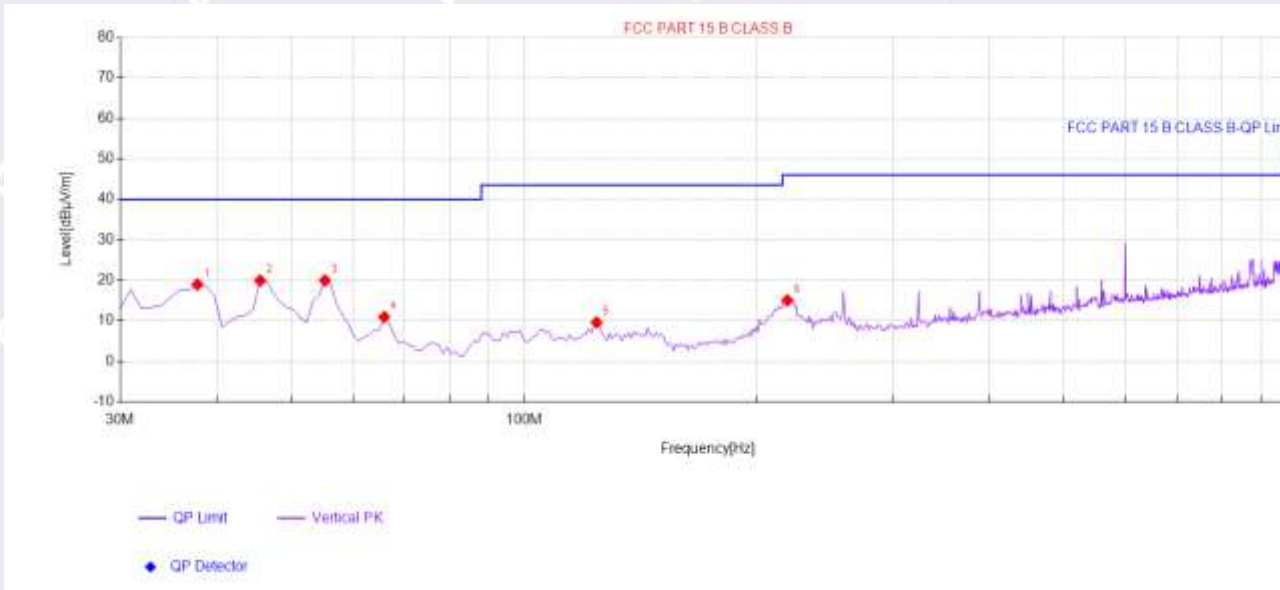

Suspected Test Data

NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Factor [dB]	Height [cm]	Angle [°]	Polarity	Result
1	37.76	18.93	40.00	21.07	-32.18	100	206	Vertical	PASS
2	45.52	19.92	40.00	20.08	-30.81	100	193	Vertical	PASS
3	55.22	19.94	40.00	20.06	-31.17	100	137	Vertical	PASS
4	65.89	10.92	40.00	29.08	-32.80	100	351	Vertical	PASS
5	124.09	9.56	43.50	33.94	-35.05	100	75	Vertical	PASS
6	219.15	15.01	46.00	30.99	-31.88	100	186	Vertical	PASS

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park, Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: .086-0755-27781492

Fax.: 086-0755-27781492

Web.:www.ast-test.com

E-mail: ast@hangtianjc.com

5.2 Radiated Disturbance 1000MHz to 6000MHz

5.2.1 Test procedure

The EUT was configured as described in section 1 for this test. The enclosure port was tested.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 and CISPR 16-1-4. The test distance was 3m for 1000MHz~6000MHz.

The set-up and test methods were according to CISPR 16-2-3.

A preliminary scan and a final scan of the emissions were made from 1000MHz to 6000MHz by using test script of software; the emissions were measured using Quasi-Peak Detector. The maximal emission value was acquired by adjusting the antenna height, polarization and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°, The receive antenna has two polarizations V and H.

5.2.2 Test method

- a) According as the EUT information, Configured the ports and powered the EUT with the normal voltage.
- b) The EUT was placed on the top of a table 0.8 meters above the ground at 3-meter SAC as figure 5-4 or 0.12m above the ground at 3-meter SAC as figure 5-5.
- c) The measuring distance of at 3m shall be used for measurements at frequency 1000MHz-6000MHz.
- d) The polarizations of the antenna were set to horizontal.
- e) The height of the test antenna was 1m.
- f) The turn table was rotating from 0° to 360° and the test receiver pre-scan.
- g) Change the height of the test antenna from 1m to 4m, then repeated f) and recorded and save the maximum value.
- h) Select six points have little margin from limit and finally reading.
- i) Recording the maximum value, and the deg. and the height of the test antenna.
- j) Change the polarizations to vertical and repeated the e) to i).

5.2.3 Test setup

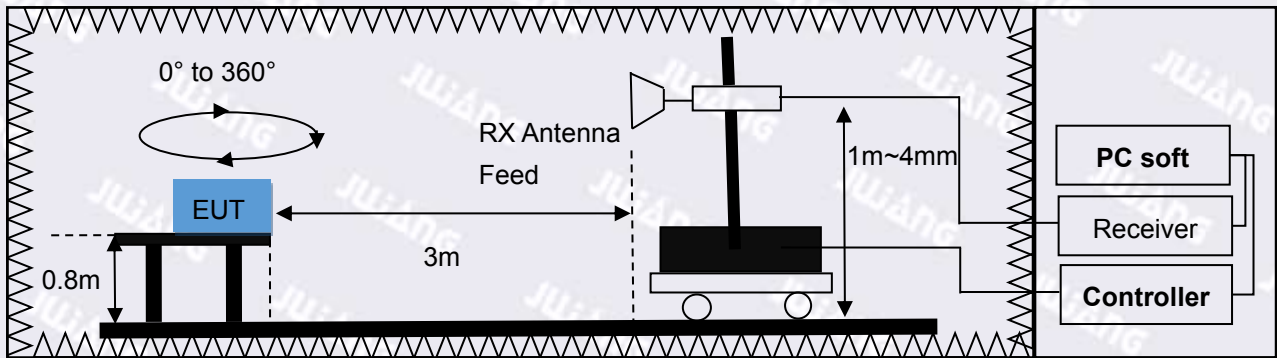


Figure 5-3 Test set-up of radiated disturbance(1000MHz-6000MHz)

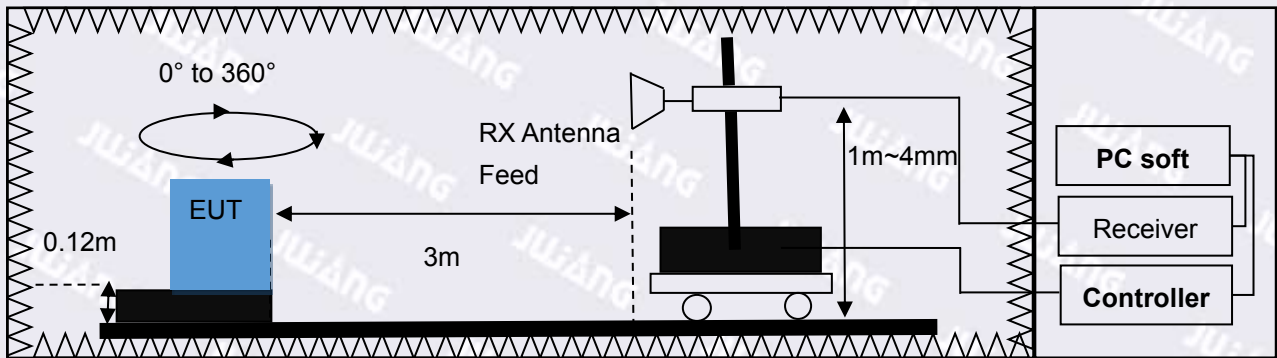


Figure 5-4 Test set-up of radiated disturbance(1000MHz-6000MHz)

5.2.4 Test limits

Table 5-2 RE test limits 1000MHz to 6000MHz

Frequency (MHz)	Class A dB μ V/m		Class B dB μ V/m	
	Peak	Average	Peak	Average
1000~3000	76	56	66	46
3000~6000	80	60	70	50

Note 1: Test distance is 3m.
 Note 2: The lower limit shall apply at the transition frequency.

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park, Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: .086-0755-27781492
 Fax.: 086-0755-27781492
 Web.:www.ast-test.com
 E-mail: ast@hangtianjc.com

5.2.5 Test results

The EUT has met requirements for Radiated disturbance. The test data as follow:

Remark:

Level= Reading Level + Factor,

Factor= Cable Loss +Antenna Factor – Amplifier,

(The Level is recorded by software which is not shown in the sheet).

Margin=Limit – Level.

N/A

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: .086-0755-27781492

Fax.: 086-0755-27781492

Web.:www.ast-test.com

E-mail: ast@hangtianjc.com

5.3 Conducted Disturbance 150 kHz to 30MHz

5.3.1 Test procedure

The EUT was configured as described in section 1 for this test. The mains cable of the EUT being measured shall be connected to LISN, The LISN shall be placed 0.8m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

All telecommunication and signal ports must be correctly terminated using either appropriate associated equipment or a representative termination during the measurement of the conducted disturbances at the mains.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1m.

The set-up and test methods were according to CISPR 16-2-3.

5.3.2 Test setup

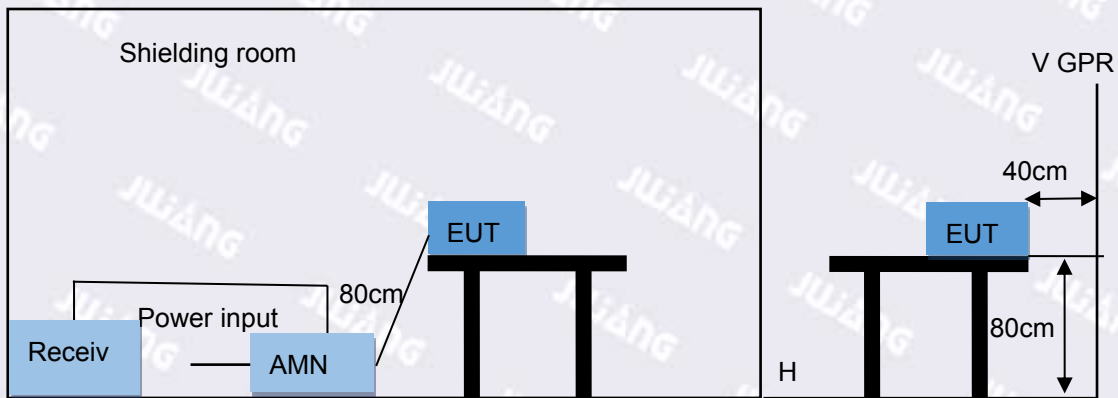


Figure 5-5 Test set-up of conducted disturbance for power port

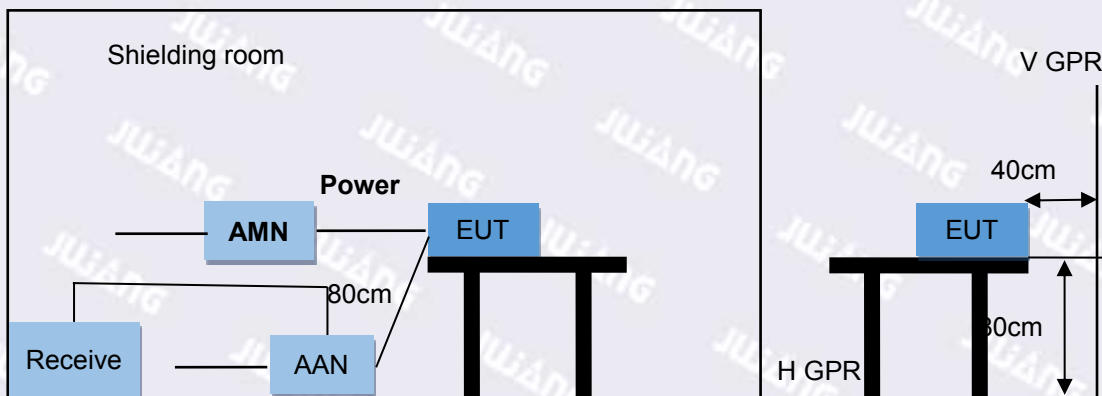


Figure 5-6 Test set-up of conducted disturbance for wired network ports

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park, Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: .086-0755-27781492

Fax.: 086-0755-27781492

Web.:www.ast-test.com

E-mail: ast@hangtianjc.com

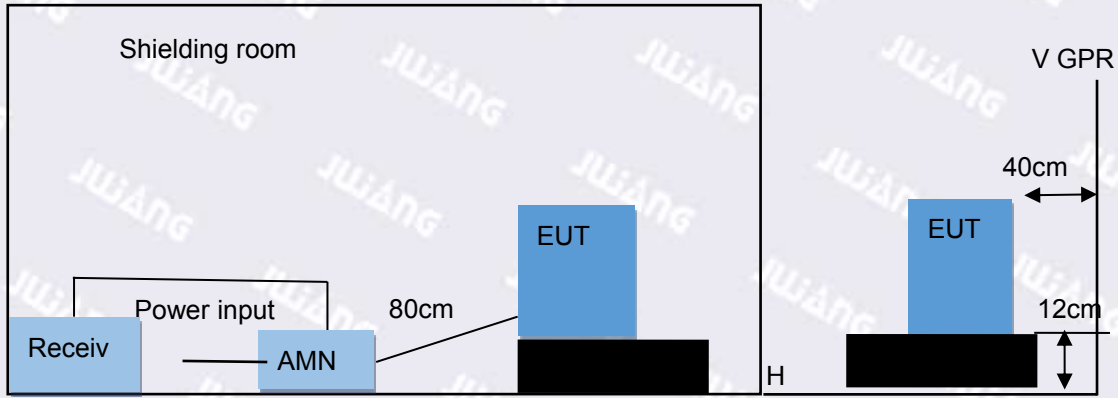


Figure 5-7 Test set-up of conducted disturbance for power port

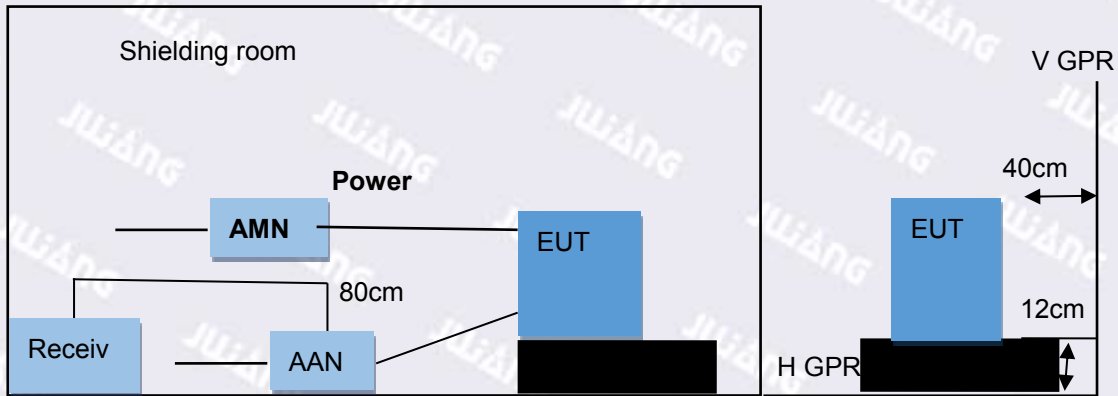


Figure 5-8 Test set-up of conducted disturbance for wired network ports

5.3.3 Test limits

Table 5-3 Test Limit of AC mains port

Frequency range	Class A dB μ V		Class B dB μ V	
	Quasi Peak	Average	Quasi Peak	Average
0.45MHz~1.705MHz	30	66	66 to 56	56 to 46
1.705MHz~30MHz	34.7	60	56	46

5.3.4 Test results

Remark:

Level= Reading Level + Correction Factor

Factor= Cable Loss + Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Margin=Limit – Level.

Aerospace Testing Technology (Shenzhen) Co., Ltd.


101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: .086-0755-27781492

Fax.: 086-0755-27781492

Web.:www.ast-test.com

E-mail: ast@hangtianjc.com

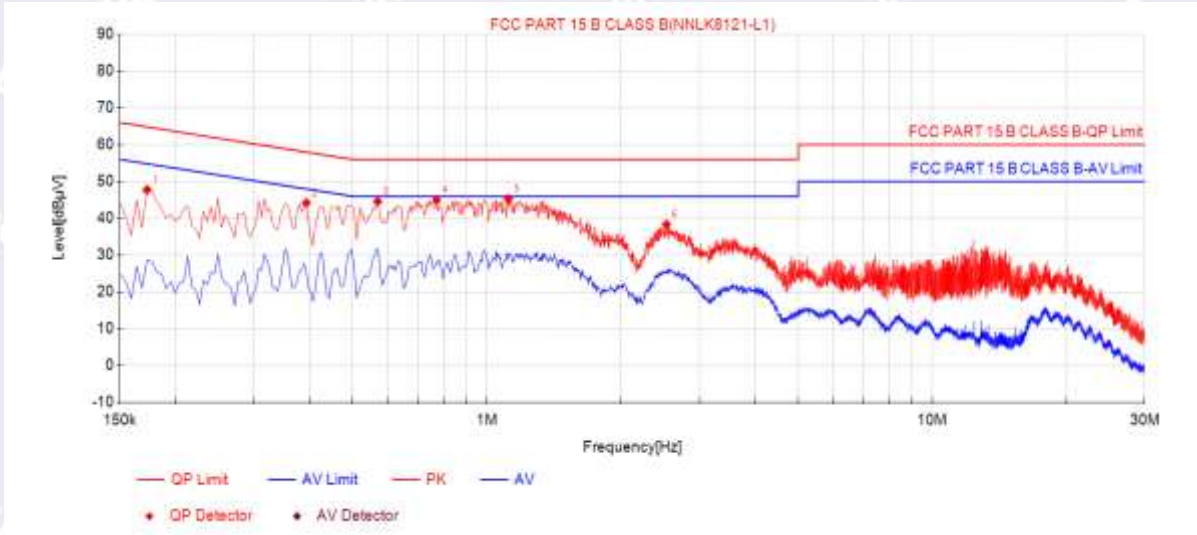

Suspected test data							
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Type	Verdict
1	0.1725	47.78	10.45	64.84	17.06	NNLK8121-L1	PASS
2	0.393	44.22	10.44	58.00	13.78	NNLK8121-L1	PASS
3	0.5685	44.60	10.43	56.00	11.40	NNLK8121-L1	PASS
4	0.771	44.95	10.41	56.00	11.05	NNLK8121-L1	PASS
5	1.1175	45.34	10.41	56.00	10.66	NNLK8121-L1	PASS
6	2.5305	38.37	10.44	56.00	17.63	NNLK8121-L1	PASS

Aerospace Testing Technology (Shenzhen) Co., Ltd.


101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park, Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: .086-0755-27781492

Fax.: 086-0755-27781492

Web.:www.ast-test.com

E-mail: ast@hangtianjc.com

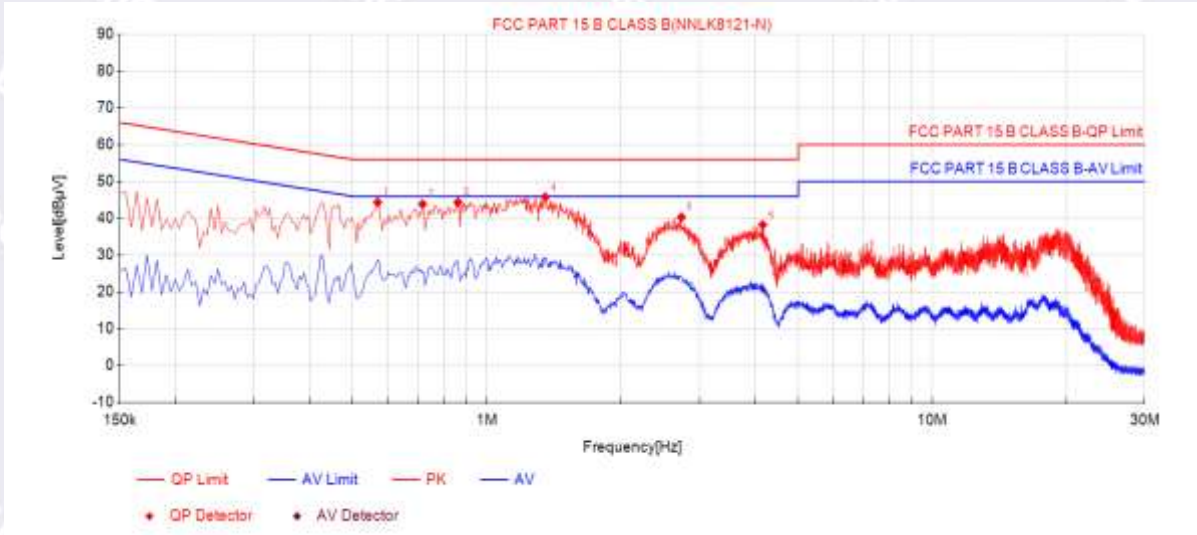

Suspected test data							
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Type	Verdict
1	0.5685	44.36	10.43	56.00	11.64	NNLK8121-N	PASS
2	0.717	43.88	10.41	56.00	12.12	NNLK8121-N	PASS
3	0.861	44.36	10.41	56.00	11.64	NNLK8121-N	PASS
4	1.3515	45.80	10.41	56.00	10.20	NNLK8121-N	PASS
5	2.733	40.33	10.44	56.00	15.67	NNLK8121-N	PASS
6	4.164	38.26	10.46	56.00	17.74	NNLK8121-N	PASS

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park, Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: .086-0755-27781492

Fax.: 086-0755-27781492

Web.:www.ast-test.com

E-mail: ast@hangtianjc.com

6. Measurement Instruments

Table 7-1 RE instruments

Item	Kind of Equipment	Manufacturer	Type No.	Calibrated until
1	EMI Test Receiver	R&S	ESU8	Aug. 24, 2023
2	Bilog Antenna	SCHWARZBECK	VULB 9163	Aug. 24, 2023
3	Horn Antenna	SCHWARZBECK	BBHA9120D	Aug. 24, 2023
4	Amplifier	Tonscend	TAP-9E6343	Aug. 24, 2023
5	Amplifier	Tonscend	TAP-051841	Aug. 24, 2023
6	Triple-Loop Antenna	Daze	ZN30401	Aug. 24, 2023

Table 7-2 CE instruments

Item	Kind of Equipment	Manufacturer	Type No.	Calibrated until
1	EMI Test Receiver	R&S	ESRP3	Aug. 24, 2023
2	LISN	Schwarzbeck	NNLK 8121	Aug. 24, 2023
3	Amplitude limiter	Schwarzbeck	VTSD 9561 F	Aug. 24, 2023

Table 7-3 ESD instruments

Item	Kind of Equipment	Manufacturer	Type No.	Calibrated until
1	ESD TEST GENERATOR	3CTest	EDS 30V	Aug. 24, 2023

Table 7-4 RS instruments

Item	Kind of Equipment	Manufacturer	Type No.	Calibrated until
1	Signal Generator	Keysight	N5181A	Aug. 24, 2023
2	Power Amplifier	Mic-top	MPA-80-1000-1000	Aug. 24, 2023
3	Power meter	Keysight	E4419A	Aug. 24, 2023
3	Power probe	Keysight	E9304A	Aug. 24, 2023
4	Power Amplifier	AR	25S1G4A	Aug. 24, 2023
5	Antenna	Schwarzbeck	STLP9149	Aug. 24, 2023

Table 7-5 EFT, AC-DIP and SURGE instruments

Item	Kind of Equipment	Manufacturer	Type No.	Calibrated until
1	Immunity test	3CTest	CCS 600	Aug. 24, 2023
2	Coupling clamp	3CTest	CCC100	Aug. 24, 2023
3	CDN	3CTest	SEPN3832T	Aug. 24, 2023
4	Voltage regulator	3CTest	VVT2216	Aug. 24, 2023

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: .086-0755-27781492

Fax.: 086-0755-27781492

Web.:www.ast-test.com

E-mail: ast@hangtianjc.com

7. Photos of the EUT



Figure 7-1 EUT

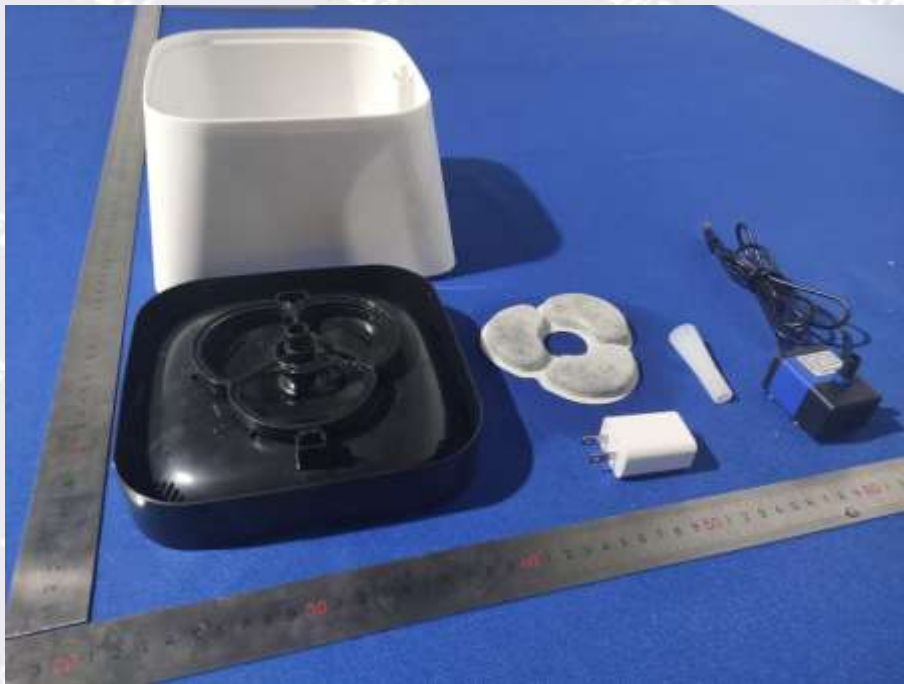


Figure 7-2 EUT

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: .086-0755-27781492

Fax.: 086-0755-27781492

Web.:www.ast-test.com

E-mail: ast@hangtianjc.com



Figure 7-3 EUT



Figure 7-4 EUT

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: .086-0755-27781492
Fax.: 086-0755-27781492
Web.:www.ast-test.com
E-mail: ast@hangtianjc.com

8. Photos of test setup



Figure 8-1 RE test setup



Figure 8-2 RE test setup

===== The End of Report =====

Aerospace Testing Technology (Shenzhen) Co., Ltd.

101, Block A4, No. 5, 8th Road, Shapu Yangyong Industrial Park,
Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: 086-0755-27781492

Fax.: 086-0755-27781492

Web.: www.ast-test.com

E-mail: ast@hangtianjc.com